















d-COLOR MF222PLUS MF282PLUS MF362PLUS MF452PLUS MF552PLUS

An innovative range of easy-to-use multifunctional colour devices offering outstanding performance and care for the environment. Designed and developed to meet professional document management requirements of different job types in a modern office environment



INNOVATIVE CONTROL PANEL WITH MULTI-TOUCH DISPLAY

REMOTE PANEL CONTROL ACCESS VIA THE WEB

SUPPORT FOR SRA3 AND BANNER PAPER FORMATS

SCAN-TO WORD, EXCEL AND POWERPOINT VIA LICENCE OPTION

PDF/A PRODUCTION WITH OCR SUPPORT VIA LICENCE OPTION

DIRECT PRINT FROM WEB AND MEMORY STICK AND MOBILE PRINTING

ERP MODE ENERGY CONSUMPTION JUST 0.2 WATT!

MF222 PLUS MF282 PLUS MF362 PLUS MF552 PLUS



9.0" multi-touch control panel with 10-key pad (optional)



Advanced security options and authentication systems

CUTTING-EDGE PERFORMANCE WITH THE FOCUS ON SUSTAINABILITY

With the introduction of the new "d-Color A3 Range", Olivetti has provided a complete line of products based on a shared philosophy and functionality.

The models comprise the d-Color MF222^{PLUS}, d-Color MF282^{PLUS}, d-Color MF362^{PLUS} d-Color MF452^{PLUS} and d-Color MF552^{PLUS} deliver high quality prints at 22ppm, 28ppm, 36ppm, 45ppm and 55 ppm, respectively, whether in colour or mono. With **600 x 1,800 dpi ConTone** quality for printing DTP documents and **1,200 x 1,200 dpi** quality for printing fine line detail, maps, drawings and small fonts.

Using the advanced functionality of the new range is easy. The innovative 9-inch Capacitive Colour Multi-touch Display adopts "Flick, Drag, Zoom and Rotate" technology, similar to the operation on today's smartphones and Tablet PCs. The menu screen provides direct access to Scan, Fax (option), Box (archive), Copy and even your corporate Intranet (via the web Licence Option). In effect, this panel becomes the access point for the functions of the machine guiding the user in the **generation**, **sharing and archiving of the company's document flow**. The menu can be customised to make processes more automatic; short cuts to functions can be created using a selected key or actions can be condensed into a single keystroke by saving macros.



Special care has also been devoted to the MFPs environmental footprint and energy consumption, to offer users significant cost savings and ensure eco-sustainability. In compliance with directives of the new Energy Star 2.0 standard, the new series lowers energy consumption to just 0.2 Watt in ErP Power-off Mode and less than 1 Watt in Sleep Mode!

REMOTE PANEL CONTROL ACCESS VIA THE WEB

Remote Panel facilitates remote access to the Colour Multi-touch Display by the administrator via a Web Browser. This capability brings new levels of client support where the user can be assisted remotely in how to use features of the machine. Remote Panel also allows the administrator to change the administrative settings of the machine remotely. In addition, to help maximise machine up-time, it is also possible for Authorised Service Providers (requires your access permission) to provide service support for certain aspects of the MFP remotely.



Direct printing and scanning with USB for direct management of Microsoft Office formats

DIRECT PRINT AND MOBILE PRINTING

For direct printing, the new "d-Color A3 Range" support PDF; XPS; TIFF, JPEG and OOXML file formats, so it is possible to print directly via a Web Browser Utility without using a Print Driver, or print directly via a Memory Stick. In addition, mobile devices such as smartphones and tablets can print directly to these models via a Mobile Printing App (Wi-Fi network connection environment and Wi-Fi Router required / Bluetooth MFP option also available for Mobile Phone users).

VERSATILE COMMUNICATIONS PLATFORM

The new "d-Color A3 Range" offers high-speed scanning of up to 80 ipm (images per minute) with the optional DF-624 Document Feeder installed, and up to **160 ipm** when using the optional DF-701 Dual-scan Document Feeder (standard with the d-Color MF452 PLUS and d-Color MF552 PLUS). When combined with the new **Scan Preview** function, the scanned job can be checked as thumbnails on the Colour Multi-touch Display post scanning, you can then delete pages, rotate pages and change basic settings before the scanned job is sent. The following Scan-to functions are available: Email (Me); SMB (folder on your PC); FTP (server); Box (archive folder) and direct to USB Memory Stick. You can save in the following file formats: JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; PPTX (PowerPoint); XPS and Compact XPS.

The standard controller can also be upgraded to support advanced PDF scanning options including a PDF/A (1a and 1b) format that meets with legal archiving requirements and Scan-to Searchable PDF (OCR). With the latest Licence Option LK-110 installed, you can now create **Office Open XML** (OOXML) files in Word docx, Excel xlsx and PowerPoint pptx. Other options include Barcode font printing, Unicode print support (for SAP printing applications).



EXCELLENT MEDIA CAPABILITY

Banner paper up to 1.2 meters in length can be fed via the bypass, providing you with the in-house flexibility of producing impactful local signage and posters.

All models support up to 256 g/m² from any paper tray and via the Automatic Duplex too. Paper Tray 2 can also support up to 500 sheets of SRA3 paper (320 mm x 450 mm) which is both wider and longer than standard A3 paper, this means it is possible to print a full A3 image with no image loss, ideal for proofing.

EXCELLENT FINISHING

When you add the optional on-line finishing capabilities, it is easy to create 20 pages (80 images) booklets with an automatic crease-fold and saddle-stitch, with a front cover of up to 209 g/m², providing professional looking B2B documents for your clients. Other optional finishing functions include Tri-fold of an A4 page into DL size ready for posting and 2 or 4 hole-punching.

IMPRESSIVE ECO PERFORMANCE


Impressive energy-saving and Eco- friendly features:

- 1 Watt Sleep / 0.2 Watt ErP Power Save Mode
- Low Typical Energy Consumption (TEC) value far below the limits set by Energy Star
- Blue Angel Award
- Dynamic Eco-Timer analyses machine usage and regulates
 Sleep timings automatically
- Super-fast warm-up time maximising productivity
- Polymerised Toner lowering Fusing temperature



This image is a representation of banner printing using the optional BT-C1e

OPTIONS

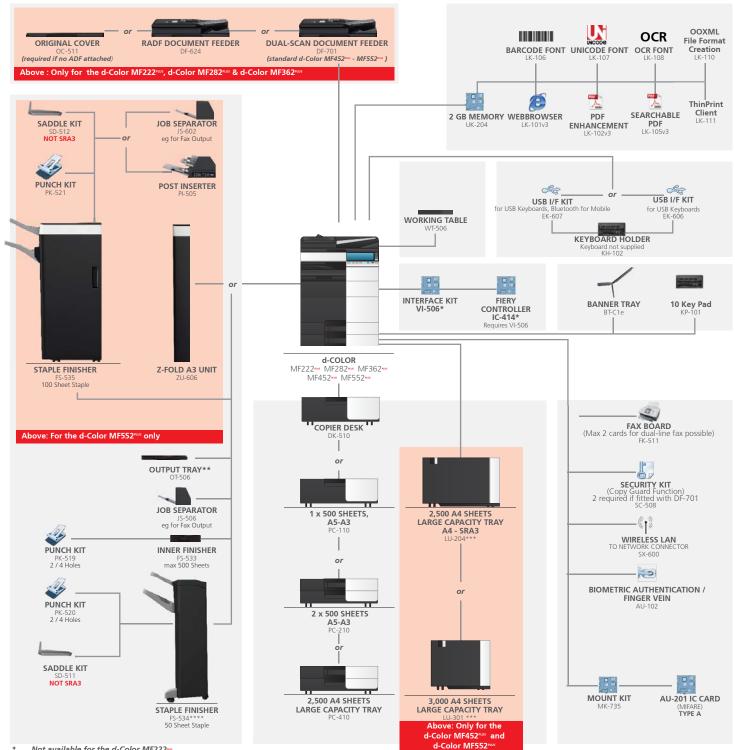

- Not available for the d-Color MF222***
- Required for the d-Color MF452*** / d-Color MF552*** when no finisher is attached
- Not compatible when DK-510 Copier Desk is installed
- **** FS-534 SD with integrated SD-511 available Autumn 2013





TECHNICAL FEATURES

| COPIER | d-Color MF222PLUS | d-Color MF282PLUS | d-Color MF362 ^{PLUS} | d-Color MF452 ^{PLUS} | d-Color MF552 ^{PLU} |
|--|--|--|---|-------------------------------|------------------------------|
| 4 Copy/Print Speed ppm | 22 | 28 | 36 | 45 | 55 |
| mono & colour; single & duplex | | | | | |
| 3 Copy/Print Speed ppm | 14 | 14 | 18 | 23 | 27 |
| mono & colour; single & duplex) | | | | | |
| Output Time in Seconds | 6.9 | 5.9 | 5.3 | 4.6 | 4.1 |
| st Copy/Print (mono) | 0.2 | 7.7 | 6.9 | 5.5 | 1.6 |
| Output Time in Seconds Ist Copy/Print (colour) | 8.3 | 1.1 | 6.9 | 5.5 | 4.6 |
| Printing Process | Electrostatic Laser Copy, | Tandom Indiract | | | |
| Toner Type | Polymer Toner | , randem munect | | | |
| Narm up Time in seconds | Approx 20 | Approx 20 | Approx 20 | Approx 25 | Approx 22 |
| Copy Resolution | 600 x 600 dpi | Арргол 20 | Арргол 20 | Арргол 23 | Αρριολ 22 |
| Gradations | 256 gradations | | | | |
| Original Format | A5-A3 | | | | |
| Enlargement | 25-400% in 0.1% Increr | ments: Automatic Zoom | | | |
| Copy Functions | | | int and Display), Digital Cre | ative Functions. Job Memo | rv (30), Image Repeat, |
| | | | py Protection, Department | | ., (= -//=9 = -/ |
| JSER BOX SPECIFICATION | | // | -) | | |
| Max. Box Memory | Up to 3,000 Documents | or 10,000 Pages | | | |
| Types of Box System | | | Group (with authentication |); Secure Printing, Encrypte | d PDF Printing; |
| | Fax Receipt, Fax Polling | | | | |
| Box Functions | | Download, Send (e-mail, F | TP, SMB and Fax), Box-to-B | ох Сору | |
| SYSTEM SPECIFICATIONS | | | | | |
| Paper-in Capacity | Standard: 1,150 | Standard: 1.150 | Standard: 1.150 | Standard: 1,150 | Standard: 1,150 |
| apo capacity | Max: 3,650 | Max: 3,650 | Max: 3,650 | Max: 6,650 | Max: 6,650 |
| Paper-out Capacity | | Finisher and up to 250 Sh | | 1VIUX. 0,030 | Wax. 0,030 |
| System Dimensions (WxDxH) | 615 x 685 x 779 mm | 615 x 685 x 779 mm | 615 x 685 x 779 mm | 615 x 685 x 921 mm | 615 x 685 x 921 mn |
| system Dimensions (WADAII) | 013 X 003 X 7 7 3 111111 | 013 X 003 X 773 IIIIII | 015 X 005 X 775 IIIIII | inc DF-701 | inc DF-701 |
| Veight | Approx 85 kg | Approx 85 kg | Approx 85 kg | Approx 101 kg | Approx 101 kg |
| Automatic Duplex | A5-SRA3; 52-256 g/m ² | , tpprox 03 kg | 7 Approx 65 kg | трргох тот ку | трргох тот ку |
| System Memory/Hard Disk | | (for intelligent ontions su | ch as LK-105 searchable PC | F and for Conv Overlay) / | 250 GB |
| nterface | 2GB Standard; 4GB max (for intelligent options, such as LK-105 searchable PDF, and for Copy Overlay) / 250 GB 10-Base-T/1,000-Base-T Ethernet / USB 2.0 / USB Host | | | | |
| Network Protocols | | | therTalk); SMB; LPD; IPP; SI | IMP: HTTP | |
| Ocument Feeder Options | | | an ADF:160 ipm colour/mc | | d on 45nnm & 55nnm mo |
| Paper Format | A6-SRA3, Customised paper format; Banner paper max 1,200 x 297 mm | | | | |
| Paper Weight | 60-300 g/m² via Bypass / 52 - 256 g/m² via Paper Trays | | | | |
| Power Consumption | | | Sleep Mode; 0.2W ErP Mod | le | |
| PRINTER | | | , | | |
| Printable Area (Max) | 307 mm x 443 mm | | | | |
| Print Resolution | | x 1,200 dpi (for line-dra v | wings & mans) | | |
| CPU | 800MHz on all models | x 1,200 apr (101 mile ara) | vings a maps, | | |
| Page Description Language | | PostScript 3 (CPSI 3016) | XPS | | |
| Operating Systems | PCL 6c (PCL 5c + XL3.0), PostScript 3 (CPSI 3016), XPS Windows XP 32/64, Windows VISTA 32/64, Windows 7 32/64, Windows 8, Server 2003/2008 32/64, 2008 R2/2012 64 | | | | |
| | Macintosh OSX / 10.x Unix / Linux / Citrix | | | | |
| Duinting Frants | | | | | |
| rinting Fonts | 80 x PCL Latin: 137 x Pos | stScript 3. Emulation Latin | | | |
| Printing Fonts Printing Functions | 80 x PCL Latin; 137 x Pos Direct printing OOXML (| | XPS, PDF and encrypted PI | OF files, Mixmedia. Mixnlex | , "Easy Set" Job Planni |
| Printing Functions | Direct printing OOXML (| | XPS, PDF and encrypted PI | DF files, Mixmedia, Mixplex | , "Easy Set" Job Planni |
| Printing Functions | | | XPS, PDF and encrypted PI | DF files, Mixmedia, Mixplex | , "Easy Set" Job Planni |
| Printing Functions | Direct printing OOXML (Overlay, Watermark | DOCX, XLSX, PPTX), TIFF, | | DF files, Mixmedia, Mixplex | , "Easy Set" Job Planni |
| CANNER Can Speed (mono & colour) | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- | | | DF files, Mixmedia, Mixplex | , "Easy Set" Job Planni |
| CANNER Scan Speed (mono & colour) Scanning Resolution | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi | DOCX, XLSX, PPTX), TIFF, | DF-624) | | , "Easy Set" Job Planni |
| CANNER Scan Speed (mono & colour) Scanning Resolution | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; So | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I | DF-624)); Scan-to-FTP; Scan-to-SM | | , "Easy Set" Job Planni |
| CANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wain S | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me) ebDAV; Scan-to-DPWS; Sc | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB | B (Scan-to-Home); | |
| CANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wook JPEG; TIFF; PDF; PDF/A 1a | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me) ebDAV; Scan-to-DPWS; Sca a and 1b (optional); Compa | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CANNER can Speed (mono & colour) canning Resolution canning Modes | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wood, Telephone, Telephone) JPEG; TIFF; PDF; PDF/A 1a PPTX and Searchable PPTX | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me) ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CANNER Scan Speed (mono & colour) Scanning Resolution Scanning Modes Sile Formats | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wook JPEG; TIFF; PDF; PDF/A 1a | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me) ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CCANNER CCANNER CCANNING Resolution CCANNING Resolution CCANNING Modes | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wood, Telephone, Telephone) JPEG; TIFF; PDF; PDF/A 1a PPTX and Searchable PPTX | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me) ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CANNER GCANNER GCANNING Resolution GCANNING Resolution GCANNING Modes | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wood, Telephone, Telephone) JPEG; TIFF; PDF; PDF/A 1a PPTX and Searchable PPTX | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me) ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CCANNER CCANNER CCANNING Resolution CCANNING R | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF-1 Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wo JPEG; TIFF; PDF; PDF/A 1a PPTX and Searchable PPT 2,100 (single + group), LI Super G3 (optional) | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me) ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CCANNER CCANNER CCANNING Resolution CCANNING R | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF-1 Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wo JPEG; TIFF; PDF; PDF/A 1a PPTX and Searchable PPT 2,100 (single + group), LI Super G3 (optional) | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me); ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I DAP support i-Fax (RFC3949-C); IP-Fax | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CCANNER CCANNER CCANNING Resolution | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wo JPEG; TIFF; PDF; PDF/A 1a PPTX and Searchable PPT 2,100 (single + group), LI Super G3 (optional) Analogue; i-Fax; Colour | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me); ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I DAP support i-Fax (RFC3949-C); IP-Fax | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CCANNER CCANNER CCANNING Resolution CCANNING R | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF- Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wo JPEG; TIFF; PDF; PDF/A 1a PPTX and Searchable PPT 2,100 (single + group), LI Super G3 (optional) Analogue; i-Fax; Colour Max.: 600 x 600 (ultra-fi | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me); ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I DAP support i-Fax (RFC3949-C); IP-Fax | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |
| CANNER GCANNER GCANNER GCANNER GCANNER GCANNER GCANNING Resolution GCANNING Modes | Direct printing OOXML (Overlay, Watermark Up to 160 ipm (with DF-1 Max.: 600 x 600 dpi Network TWAIN Scan; Scan-to-Box; Scan-to-Wo JPEG; TIFF; PDF; PDF/A 1a PPTX and Searchable PPT 2,100 (single + group), LI Super G3 (optional) Analogue; i-Fax; Colour Max.: 600 x 600 (ultra-fi MH; MR; MMR; JBIG | DOCX, XLSX, PPTX), TIFF, 701) / Up to 80 ipm (with I can-to-eMail (Scan-to-Me); ebDAV; Scan-to-DPWS; Sc a and 1b (optional); Compa TX (optional); Searchable I DAP support i-Fax (RFC3949-C); IP-Fax | DF-624)); Scan-to-FTP; Scan-to-SM an-to-USB act PDF ; Encrypted PDF; Se | B (Scan-to-Home); | |

Product performances are referred to as appropriate use under optimal conditions. The registered trademarks are the property of their respective owners.

The support and availability of the listed specifications and functionalities varies depending upon operating systems, applications, network protocols as well as network and system configurations. All information relating to specification and accessories is subject to change without notice. Olivetti does not guarantee that any prices or specifications mentioned will be error-free.

OLIVETTI UK LIMITED. 500 AVEBURY BOULEVARD MILTON KEYNES, MK9 2BE www.olivettiuk.com





